


INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁷ : B01F 5/08	A1	(11) International Publication Number: WO 00/15327 (43) International Publication Date: 23 March 2000 (23.03.00)
<p>(21) International Application Number: PCT/SE99/01593</p> <p>(22) International Filing Date: 13 September 1999 (13.09.99)</p> <p>(30) Priority Data: 9803124-8 15 September 1998 (15.09.98) SE</p> <p>(71) Applicant (for all designated States except US): TETRA LAVAL HOLDINGS & FINANCE SA [CH/CH]; 70, avenue Général-Guisan, CH-1009 Pully (CH).</p> <p>(72) Inventors; and (75) Inventors/Applicants (for US only): INNINGS, Fredrik [SE/SE]; Slussvägen 12 I, S-211 30 Malmö (SE). MALMBERG, Rolf [SE/SE]; Spårsnövägen 44, S-226 52 Lund (SE).</p> <p>(74) Agent: BRUNNSTRÖM, Gunilla; AB Tetra Pak, Patent Dept., Ruben Rausing's gata, S-221 86 Lund (SE).</p>	<p>(81) Designated States: AE, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CR, CU, CZ, DE, DK, DM, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, UA, UG, US, UZ, VN, YU, ZA, ZW, ARIPO patent (GH, GM, KE, LS, MW, SD, SL, SZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).</p> <p>Published With international search report. Before the expiration of the time limit for amending the claims and to be republished in the event of the receipt of amendments.</p>	

(54) Title: A METHOD OF HOMOGENIZATION

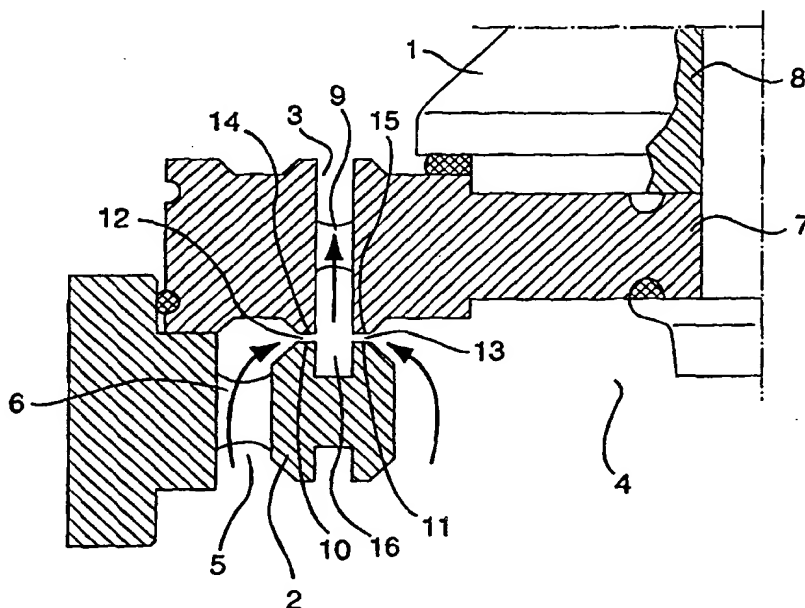

(57) Abstract

The invention relates to a method of homogenization of a pressurised liqueform emulsion, such as milk. The liquid is caused to pass at least two concentrically placed homogenization gaps (12, 13) which are formed in the space between two narrow surfaces (10, 11) on a fixed valve seat (2) and two narrow surfaces (14, 15) on a movable valve cone (1). When the liquid passes the homogenization gaps (12, 13), a first homogenization takes place. The homogenization is rendered more efficient in that the liquid, when it passes out from one of the homogenization gaps (12) at high speed and in a restricted space, meets the liquid out from one or more of the other homogenization gaps (13).

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece	ML	Mali	TR	Turkey
BG	Bulgaria	HU	Hungary	MN	Mongolia	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MR	Mauritania	UA	Ukraine
BR	Brazil	IL	Israel	MW	Malawi	UG	Uganda
BY	Belarus	IS	Iceland	MX	Mexico	US	United States of America
CA	Canada	IT	Italy	NE	Niger	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NL	Netherlands	VN	Viet Nam
CG	Congo	KE	Kenya	NO	Norway	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NZ	New Zealand	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	PL	Poland		
CM	Cameroon	KR	Republic of Korea	PT	Portugal		
CN	China	KZ	Kazakhstan	RO	Romania		
CU	Cuba	LC	Saint Lucia	RU	Russian Federation		
CZ	Czech Republic	LI	Liechtenstein	SD	Sudan		
DE	Germany	LK	Sri Lanka	SE	Sweden		
DK	Denmark	LR	Liberia	SG	Singapore		
EE	Estonia						